


# Change Mode 868–878–578–6X2

Doing this Mod Can/Will void your warranty.

Download this [software](#) and un-Zip with ( [7-Zip](#) – [Video 1](#) – [Video 2](#) )

***Software requires Windows 7 or higher***

Open the software by double clicking on the - AT\_Options.exe -

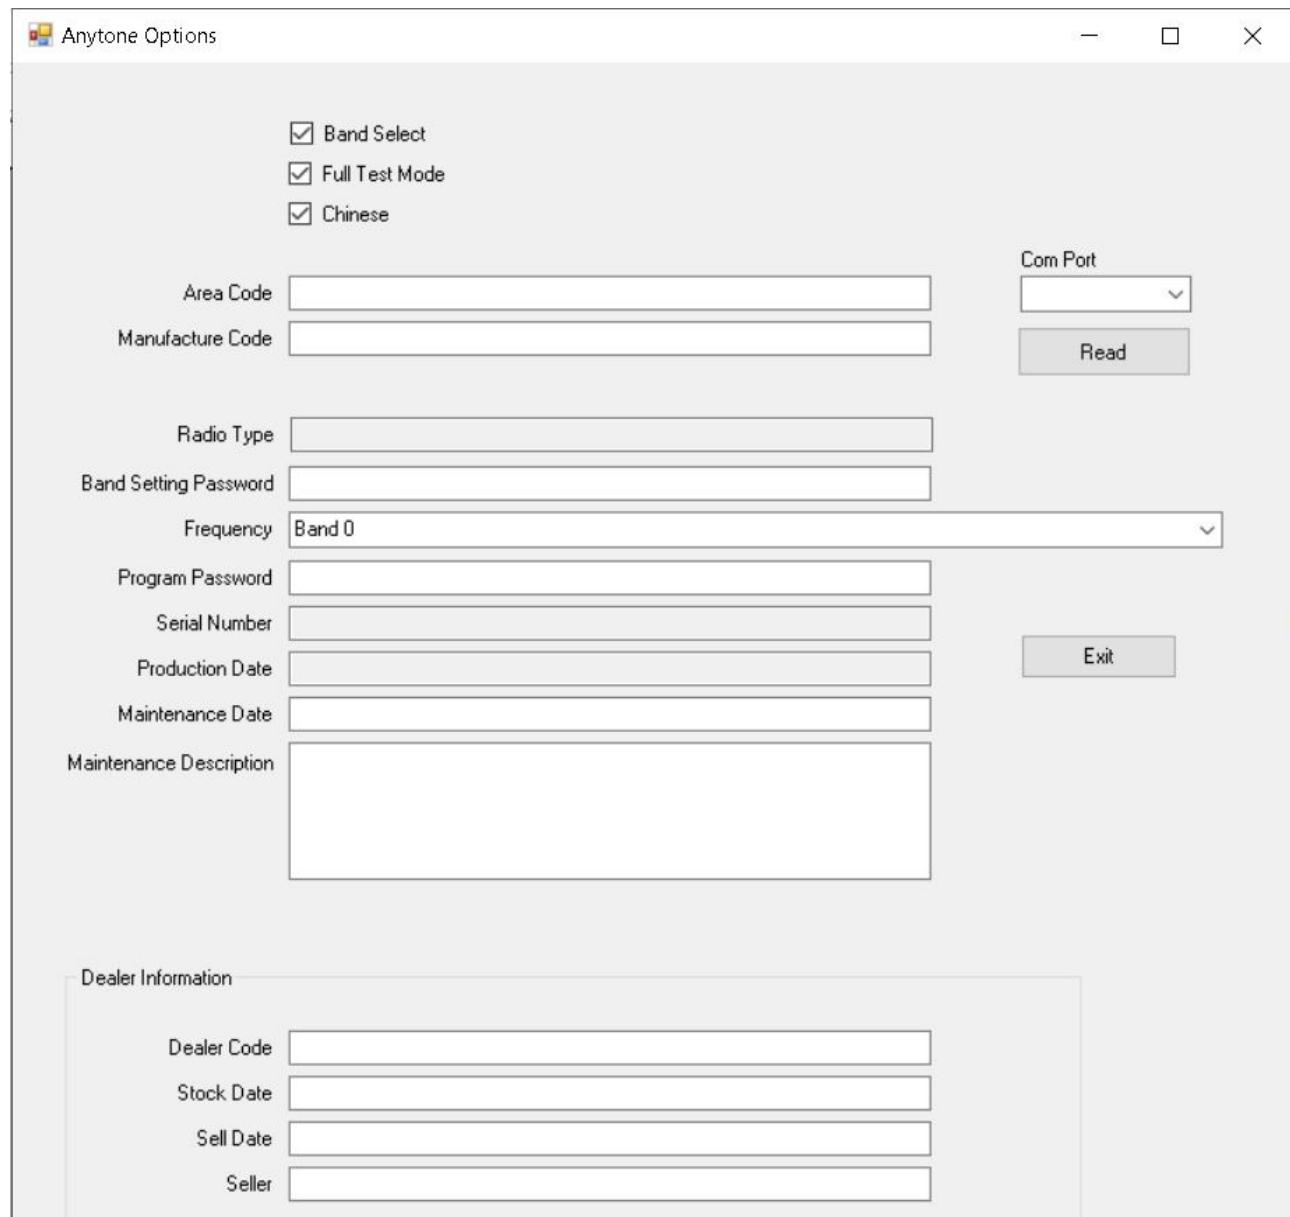

Plug radio into Computer.

Set Com Port.

Then Click – **Read**.

The radio will send info and reboot.

The info for that radio is now in the software.

Go to Frequency and you will see what your radio default is.

### UK we want to change to Band 0

Use the pull down to select the band you want.

Now **Write** back to radio.

Anytone Options

Band Select  
 Full Test Mode  
 Chinese

Area Code:   
Manufacture Code:

Com Port: COM4

Radio Type: D578UV

Band Setting Password:

Frequency: Band 0 Rx:400-480 136-174 Tx:400-480 136-174

Program Password:   
Serial Number: 1909060170140005  
Production Date: 2019-9-6  
Maintenance Date:   
Maintenance Description:

Exit


Dealer Information

Dealer Code:   
Stock Date:   
Sell Date:   
Seller:

Next

In the CPS – Model – Model Information

Make sure the Band displayed matches the same as you have now set the Radio to.

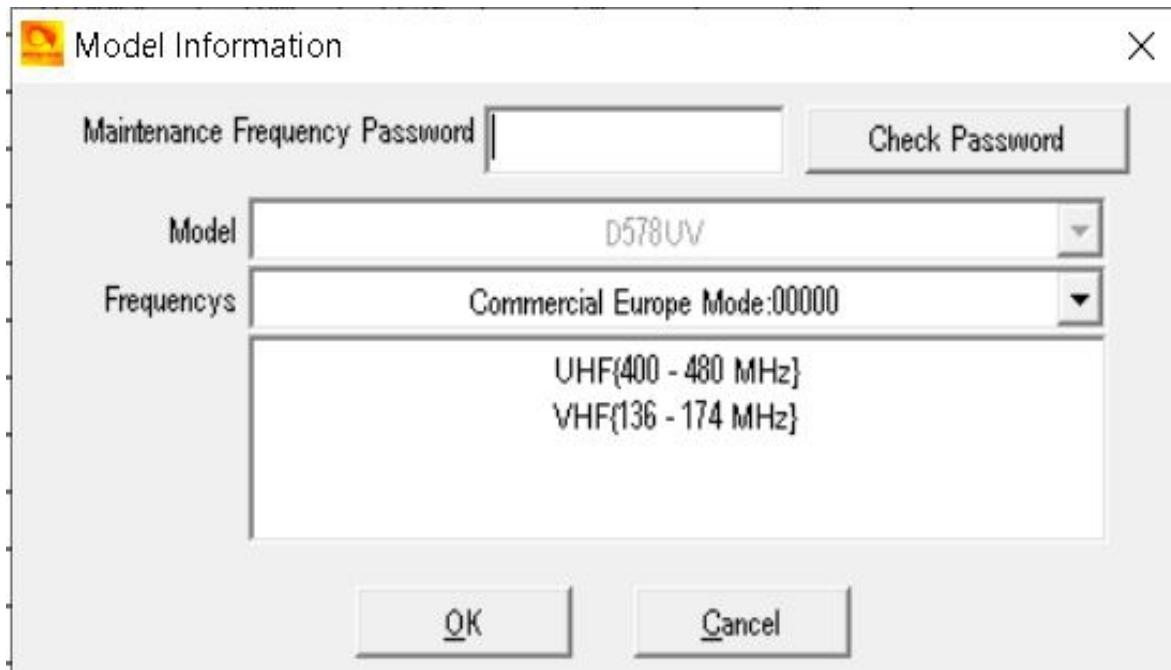

Options

1. Read the radio to the CPS and build your codeplug.
2. Via [Import CSV](#) rebuild your codeplug.

Remember to save this as your working Codeplug.

That is it.

<http://tiny.cc/AnytoneDMR>